


METALLIZED POLYESTOR FILM CAPACITORS(MINI-BOX)

金屬化聚酯薄膜電容器(小盒型)

MEB Series

•FEATURE 特點

- (1) Non-inductive construction
- (2) Self-healing
- (3) Flame-proof plastic case (compliance with UL94V-0)
- (4) Space saving, Miniature size
- (1) 無感型結構
- (2) 自愈性
- (3) 不燃性塑膠盒(符合UL94V-0)
- (4) 體積小, 小型化特性

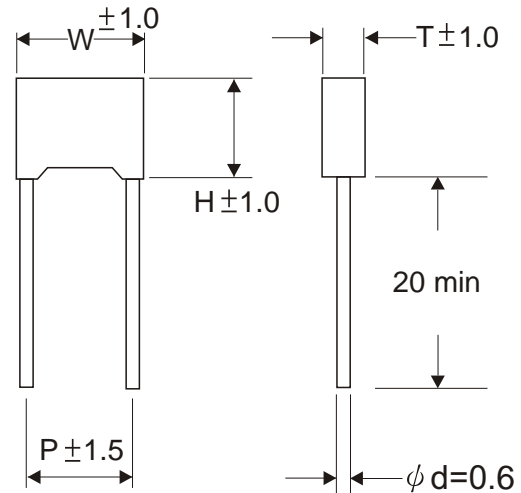

•SPECIFICATIONS 規格

Operating Temperature Range 操作溫度範圍	-40°C ~ +85°C
Rated Working Voltage 額定工作電壓	50V, 63V, 100V (DC)
Rated Capacitance Range 電容值範圍	0.001 μF ~ 1.0 μF
Capacitance Tolerance 電容誤差值	J (± 5%), K (± 10%), M (± 20%)
Dielectric Strength 誘電強度	Withstand 150% of rated working voltage for 1 minute at 25 degree C.
Dissipation Factor (D.F.) 散逸因子	Less than 1.0% at 1KHz, 25°C
Insulation Resistance 絕緣電阻	10,000 MΩ min., for C ≤ 0.33 μF 1,000 MΩ X μF min., for C > 0.33 μF

• DIMENSIONS 尺寸

(unit: mm)

W.V.	50V DC			63V DC			100V DC		
Cap.(μF)	W	H	T	W	H	T	W	H	T
0.001	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.01	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.047	7.2	6.5	2.5	7.2	6.5	4.0	7.2	8.5	4.5
0.068	7.2	6.5	2.5	7.2	6.5	4.0	7.2	8.5	4.5
0.082	7.2	6.5	2.5	7.2	6.5	4.0	7.2	9.0	5.0
0.1	7.2	6.5	2.5	7.2	6.5	4.0	7.2	10.5	5.0
0.15	7.2	7.5	3.5	7.2	7.5	4.5			
0.22	7.2	7.5	3.5	7.2	8.0	4.5			
0.33	7.2	8.5	4.5	7.2	9.0	5.0			
0.47	7.2	8.5	4.5						
1.0	7.2	11.0	6.0						